

FLEX-D-24**SPECIFICATION**

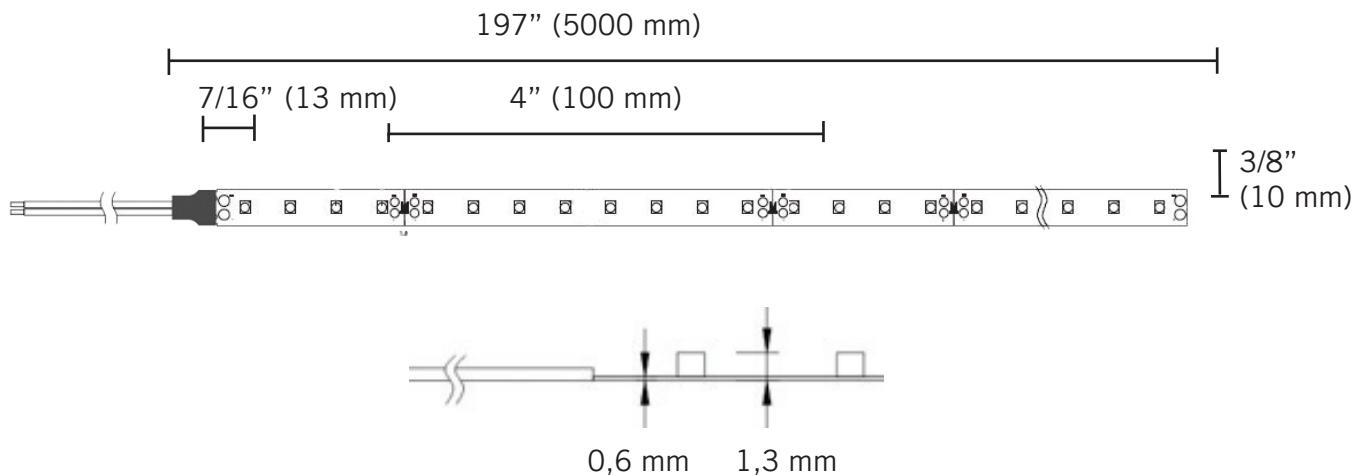
Power: 2,9 watts by foot
 Voltage: 24 VDC
 Lumens: 315 to 409 by foot
 Beam angle: 120°
 Available white: 3000K, 3500K, 4000K ou 5000K
 Lifespend: 36 000 hours
 Wire length: 2' (600 mm)
 Cut: 4" (100 mm)
 Protection: IP 22 (D)
 Dimmable: yes

**To order**

FLEX - D - 24 - 30K - 2

Flex	D: Indoor (IP 22)	24: 24 LED by foot	30K: 3000K *35K: 3500K 40K: 4000K *50K: 5000K	2: 24 inches 3: 36 inches 4: 48 inches 5: 60 inches 6: 72 inches 7: 84 inches 8: 96 inches
------	-------------------	--------------------	--	--

*Special order, allow 4 to 6 weeks for delivery

PRODUCT DIMENSIONS

INTENDED USE

FLEX-D-24 series strips are ideal for creating powerful utility lighting. They can be installed in tight spaces, under counters, in cabinets, kick-spaces, behind objects or in drop ceilings.

Available in 3000K, 3500K, 4000K ou 5000K, the FLEX-D-24 series will complement any decor.

WARNING

1. Install this product in accordance with the applicable electrical code. This product is designed for installation by a qualified person or electrician.
2. This product is designed to operate with a 24 VDC Class 2 transformer. Never connect directly to a high-voltage source.
3. This product is designed for indoor use and is not protected from moisture.

WARRANTY

This product is warrented against manufacturing defects for a period of one (1) year or three (3) years limited* from the date of purchase and does not include the other products shown on this sheet, if any. For a complete description of the warranty, visit www.innovadel.com or contact our technical support. Any modification, alteration, improper installation of the product, or cutting of connectors, will void the warranty.

* Set up by a certified installer

* Cutting and welding made in the workshop by technician authorized by InnovaDEL

* Installed in aluminium channel of the FLEX-MOUL serie