

# FLEX-D-48

## SPECIFICATION



Power: 4,4 watts by foot  
 Voltage: 24 VDC  
 Lumens: 455 to 677 by foot  
 Beam angle: 120°  
 Available white: 3000K, 3500K, 4000K ou 5000K  
 Lifespend: 36 000 hours  
 Wire length: 2' (600 mm)  
 Cut: 2" (50 mm)  
 Protection: IP 22 (D)  
 Dimmable: yes




### To order

**FLEX - D - 48 - 30K - 2**

Flex	D: Indoor (IP 22)	48: 48 LED by foot	30K: 3000K *35K: 3500K 40K: 4000K *50K: 5000K	2: 24 inches 3: 36 inches 4: 48 inches 5: 60 inches 6: 72 inches 7: 84 inches 8: 96 inches
------	-------------------	--------------------	--	--

\*Special order, allow 4 to 6 weeks for delivery

## PRODUCT DIMENSION

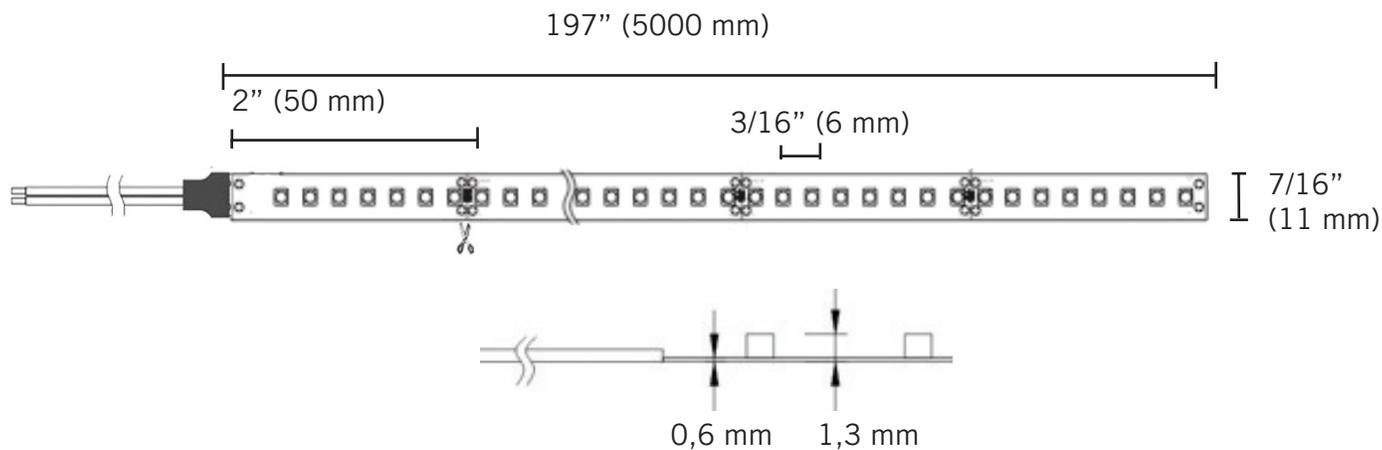

## **INTENDED USE**

---

The FLEX-D-48 series strips are ideal for kitchen cabinet lighting, kick-spaces, display stands and drop ceilings, where powerful lighting is desired. The high number of LEDs per linear foot eliminates the spot effect when used with a aluminium channel.

Available in 3000K, 3500K, 4000K ou 5000K, the FLEX-D-48 series will complement any decor.

## **WARNING**

---

1. Install this product in accordance with the applicable electrical code. This product is designed for installation by a qualified person or electrician.
2. This product is designed to operate with a 24 VDC Class 2 transformer. Never connect directly to a high-voltage source.
3. This product is designed for indoor use and is not protected from moisture.

## **WARRANTY**

---

This product is warrented against manufacturing defects for a period of one (1) year or three (3) years limited\* from the date of purchase and does not include the other products shown on this sheet, if any. For a complete description of the warranty, visit [www.innovadel.com](http://www.innovadel.com) or contact our technical support. Any modification, alteration, improper installation of the product, or cutting of connectors, will void the warranty.

\* Set up by a certified installer

\* Cutting and welding made in the workshop by technician authorized by InnovaDEL

\* Installed in aluminium channel of the FLEX-MOUL serie